




Product Catalogue



Aluminium Bag

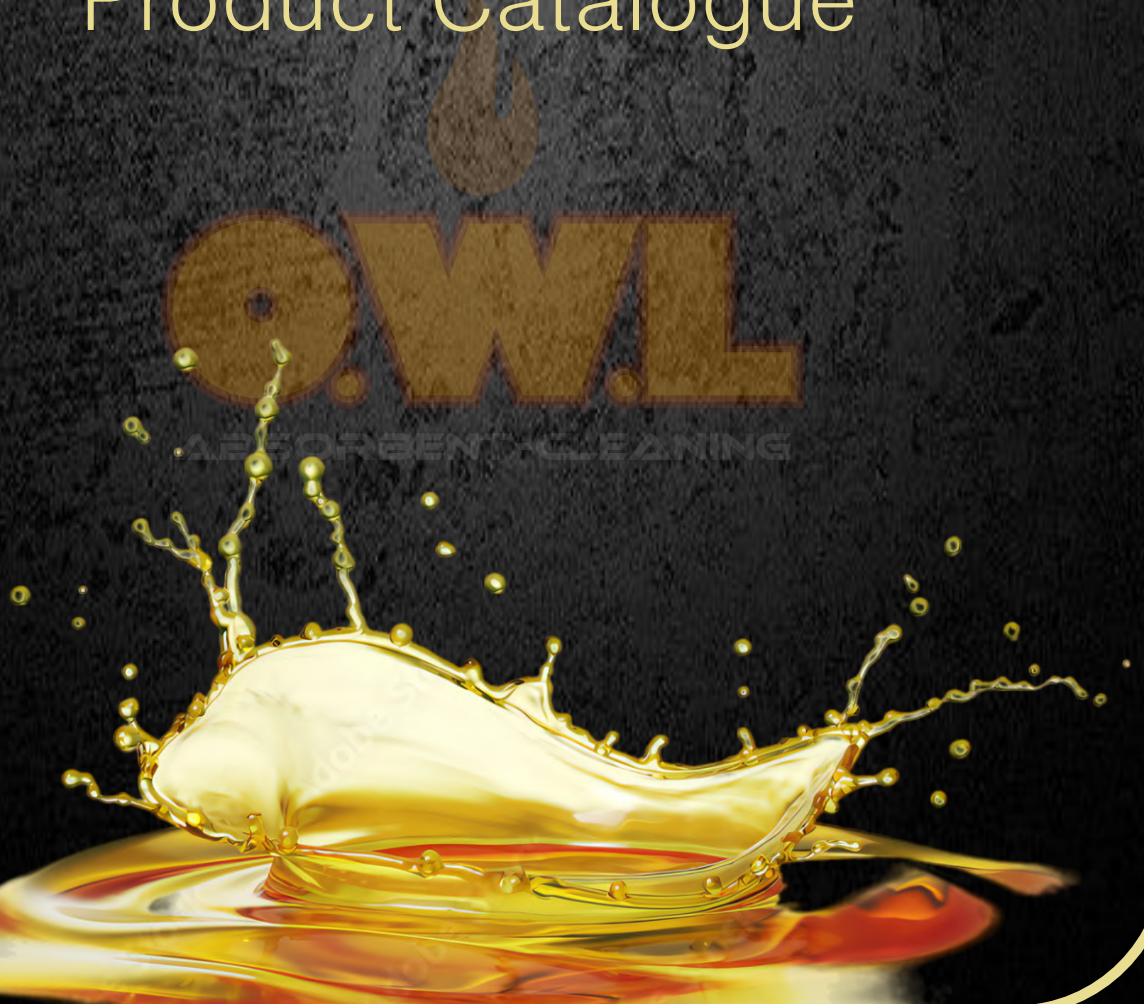

CODE	VOLUME
F000200 I	2 Lit
F000500 I	5 Lit
F000800 I	8 Lit
F006500 I	65 Lit

100% Natural Biodegradable, Oleophilic, Hydrophobic, Non-abrasive Non-toxic, Easy disposal, High energy value Absorbs oils, petrol, chemicals, paints, and much more...

Bucket



CODE	VOLUME
F001000 I	10 Lit
F002500 I	25 Lit

100% Natural Biodegradable, Oleophilic, Hydrophobic, Non-abrasive Non-toxic, Easy disposal, High energy value Absorbs oils, petrol, chemicals, paints, and much more...

Sack



CODE	VOLUME
F003000 I	30 Lit
F005000 I	50 Lit

100% Natural Biodegradable, Oleophilic, Hydrophobic, Non-abrasive Non-toxic, Easy disposal, High energy value Absorbs oils, petrol, chemicals, paints, and much more...

Pallet Bag



CODE	VOLUME
F3025001	3,025 Lit

100% Natural Biodegradable, Oleophilic, Hydrophobic, Non-abrasive Non-toxic, Easy disposal, High energy value Absorbs oils, petrol, chemicals, paints, and much more...



EMERGENCY KIT



Mini



CODE	VOLUME
EK001003	6 Lit

INCLUDES

- Fiber 2 litter
- Square 1 piece 30X30
- Eco cleaner 1 spray 1 liter
- Oil pads 40x50 - 20 pieces
- One-use gloves 5 set

Normal



CODE	VOLUME
EK002003	15 Lit

INCLUDES

- Fiber 5 litter
- Eco cleaner 1 spreu 1 liter
- Oil pads 40X50- 50 pieces
- ABSORBENT PIPE WITH FIBER 1500x0.20
- Square 2 piece 30X30
- One-use gloves 5 set
- ANTI-FRICTION SHOVEL MINI

Big



CODE	VOLUME
EK003003	120 Lit

INCLUDES

- Eco cleaner 1 spreu 5 liter
- Oil pads 40X50- 100 pieces
- ABSORBENT PIPE WITH FIBER 1500x0.20
- Protection Barriers 3m x0.13
- One-use gloves 20 set
- ANTI-FRICTION SHOVEL small
- Square 2 piece 45x45



Eco

CODE	VOLUME
OC001002	1 Lit
OC010002	10 Lit
OC020002	20 Lit
OCS01002	1 Lit Sprey
OCS02002	2 Lit Sprey
OCS05002	5 Lit Sprey
OCS08002	8 Lit Sprey





Euro

CODE	VOLUME
OC001002	1 Lit
OC010002	10 Lit
OC020002	20 Lit
OCS01002	1 Lit Sprey
OCS02002	2 Lit Sprey
OCS05002	5 Lit Sprey
OCS08002	8 Lit Sprey



Euro X

CODE	VOLUME
OC001002	1 Lit
OC010002	10 Lit
OC020002	20 Lit
OCS01002	1 Lit Sprey
OCS02002	2 Lit Sprey
OCS05002	5 Lit Sprey
OCS08002	8 Lit Sprey

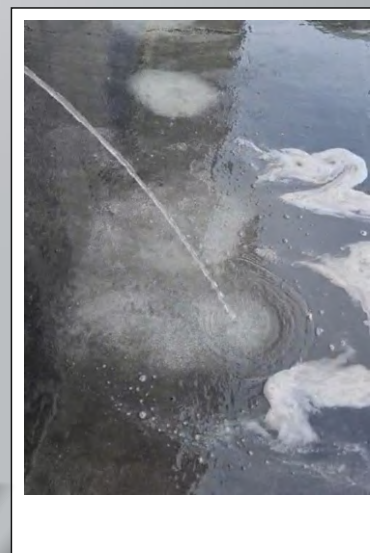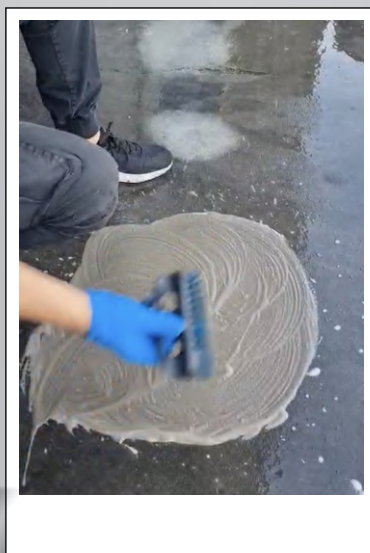

Spill Floor



CODE	DIMENSIONS	WEIGHT
SF001006	2000x70x50	4,0 Kgr
SF002006	3000x100x100	12,0 Kgr
SF003006	450x45	1,7 Kgr



Well Sealand




CODE	DIMENSIONS	WEIGHT
WS001007	500x500x8	2,2 Kgr
WS002007	600x600	3,2 Kgr
WS003007	700x700	4,3 Kgr



Sealing Horizontal Well



CODE	DIMENSIONS	WEIGHT
SHW01007	1600x450x8	6,4 Kgr

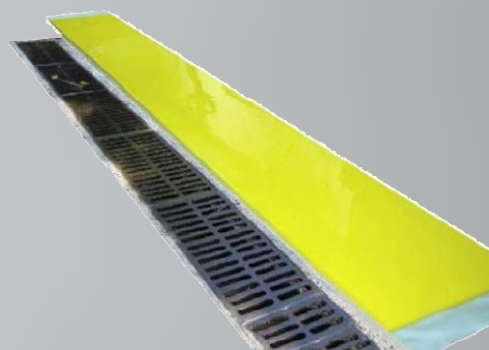

Square




CODE	DIMENSIONS	WEIGHT
AC001008	20x25	0,20
AC002008	30x30	0,65
AC003008	30x40	0,85
AC004008	45x45	1,50
AC005008	50x60	7,00
AC006008	40x80	2,50

Absorbent Pipe with Fiber




CODE	DIMENSIONS	WEIGHT
AP001009	1.500x0.15	1,30
AP002009	1.500x0.20	2,60
AP003009	1.000x0.15	1,15
AP004009	2.000x0.15	3,60
AP005009	2.000x0.20	4,85
AP006009	3.000x0.20	7,00
AP007009	1.500x0.12	1,50

Carpet

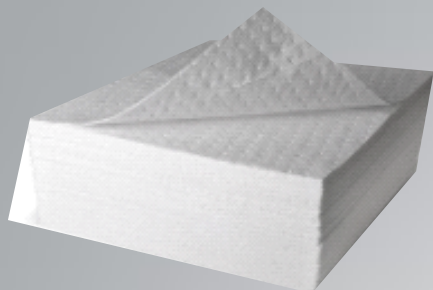

CODE	DIMENSIONS	ITEMS	WEIGHT
PA001011	40x50	100	4 Kgr
PA002011	40x50	200	8 Kgr



Carpet Rolls



CODE	DIMENSIONS	ITEMS	WEIGHT
PA003011	44x0.5m	1	5 Kgr
PA004011	44x1.0m	2	10 Kgr

Sweep Rolls



CODE	DIMENSIONS	ITEMS	WEIGHT
PA005011	44x0.78m	1	8.5 Kgr

Protection Barriers



CODE	DIMENSIONS	ITEMS	WEIGHT
PA006011	3m x 0.13	1	10



Protection Barriers X



CODE	DIMENSIONS	ITEMS	WEIGHT
PA007011	3m x 20,0cm	1	20,0 Kgr
PA008011	1.2m x 7.5cm	1	4,5 Kgr
PA009011	3m x 10,0cm	1	4,5 Kgr




Anti-Friction Shovel Mini



CODE

PT001010


Anti-Friction Shovel Small

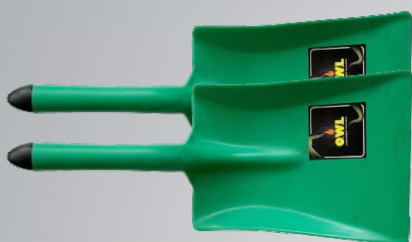

CODE

PT002010

Anti-Friction Shovel Big

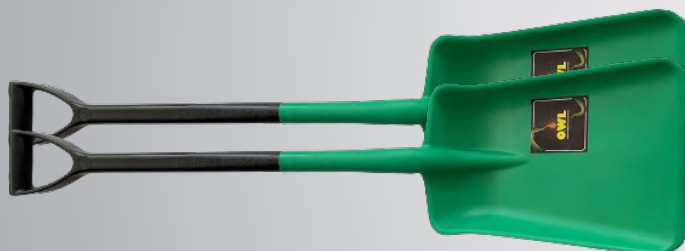

CODE

PT003010

Presentation Case



CODE

PT004010

Distribution Cart



CODE

PT005010



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 1 from 20

TEST REPORT



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 4 from 20

RESULTS OF ANALYSIS

Sample code: 051223-26 (part of plant analysis)



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 2 from 10



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 5 from 20



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 6 from 20

RESULTS OF ANALYSIS

Sample code: 051223-25 (part of plant origin)

Amino acid/amide and cholic amide/amide



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 7 from 20

RESULTS OF ANALYSIS

Sample code: 051223-25 (part of plant origin)

Carbamate pesticides and their metabolites



ANDREOY K. PC
CHEMICAL LABORATORIES

Agios Paraskevas Str. 38 & Katoia Str. P.C.131 22 Ilion
Tel: 210 33 11 347 - 46, Fax: 210 33 17 133
Email: info@andk.gr, Website: www.andk.gr

Report Code	051223-25
Date: 18-01-24	Page 8 from 20

RESULTS OF ANALYSIS

Κωδικός δείγματος: 051223-25 (τύπος φυτικής προέλευσης)

Nicotinoid pesticides

Parameter	Analytical Method	Result	LoQ	Units
2,4-Dichlorophenoxy acid	In house P-PELIMS02	MA	0,01	mg/kg dry
Acetamiprid		MA	0,01	mg/kg dry
Imidacloprid		MA	0,01	mg/kg dry
Imidacloprid oxotin		MA	0,01	mg/kg dry
Imidacloprid urea		MA	0,01	mg/kg dry
Lufenoxuron	MA	MA	0,01	mg/kg dry
Thiamethoxam		MA	0,01	mg/kg dry

Other pesticides

Parameter	Analytical Method	Result	LoQ	Units
Azinphosmethyl	In house P-PELIMS02	MA	0,01	mg/kg dry
λ-bifenthrin		MA	0,01	mg/kg dry
λ-methoxy-α-cypermethrin		MA	0,01	mg/kg dry
λ-methoxy-methoxy-α-cypermethrin		MA	0,01	mg/kg dry
λ-permethrin		MA	0,01	mg/kg dry
λ-synergeth-methoxy		MA	0,01	mg/kg dry
Permethrin		MA	0,01	mg/kg dry
Pyrethrin		MA	0,01	mg/kg dry

Abbreviations: MA: Not Detectable LoQ : Limit of Quantification
= LoQ : less than the Limit of Quantification

Note: The above parameters were determined in a cooperating laboratory of the ACL, accredited according to the ISO 17025 standard.


Z. K. ANDREOY
CHIEF ANALYST
 The Head of Laboratory

[illegible]

OIL CLENER EURO

Martin Application ENVIRONMENTAL
TALLY PRIMORDY
**HEAVY DUTY NEUTRAL WATER BASED CLEANER-DE-
GREASER**

Description:

A multi purpose heavy duty neutral, water based, environmentally friendly, biodegradable, cleaner degreaser suitable for use on metals and coatings. Non toxic, non flammable and safe to use. Compatible with oil-water separators. Very economical.

Advantages:

OIL CLENER EURO can be used as many different applications in different rates of dilution. It has many general cleaning and degreasing applications such as grease removal, oil, sludge, carbon deposits, general dirt, vegetable and animal oils. Also can be used to clean engine room cleaner. After its use it decomposes in the bilges or septicage. Suitable for use with oil/water separator.

Instructions for use:

OIL CLENER EURO is a general cleaner – degreaser can be used neat or diluted from 1 to 20 parts of water according to the type and amount of soil removed. Use full dilute sprays before being allowed to separate for at least 3 hours before being treated in oil/water separator.

OIL CLENER EURO is a dosage tank cleaner :

- With tank washing machine the pump rate between 5% – 7%, by incirculation method a solution ratio between 1 : 5 to 10 should dilute up to 1 : 4 tanks depending on the contamination.
- Spot cleaning **OIL CLENER EURO** can be used by hand spraying neat or diluted from 1 to 2 parts of water. Use solutions onto surface for cleaning up to 20 : 30

OIL CLENER EURO X **TALLY PRIMORDY** **INDUSTRIAL APPLICATIONS- HEAVY DUTY WATER-BASED CLEANER-DEGREASER**

Description:

OIL CLENER EURO X is a multipurpose, water based, cleaner with surfactants for fast effective cleaning. Does not contain chlorinated solvents.

OIL CLENER EURO X can be used for cleaning internal oil and grease from air coolers, machinery parts, diesel engine components, compressor containers, tank tops, bellows, valves, boiler tanks etc. It is also suitable for engine rooms and for cleaning degreasing of structures. Effectively removes oil and carbon scale and hydrophobic fluids from heat exchanger surfaces. Lowers and helps break down greases, burning particles and grease films, has a strong emulsifying action by it can be used as **OIL CLENER EURO X** can be used as an all purpose degreaser/detergent. **OIL CLENER EURO X** is a multi-purpose cleaner that can be used for any cleaning-operation such as steam cleaning, cleaning, immersion cleaning, ultrasonic cleaning, rifle-on cleaning etc. IN MARINE, AVIATION, TRANSPORTATION & INDUSTRY.

Advantages:

- Excellent solvent for grease and oil.
- Safe on all metals including rough steel, cast iron, painted steel, mild steel, magnesium, aluminum, titanium, acrylic plastics, glass etc.
- Not on polymeric elastomers and rubbers.
- Contains no phosphates or heavy metal salts.
- Surface-tension-lowering.

It is approved according to the Greek Legislation by the State General Chemical Laboratory with Approval No.1062/10/2006.

Standards for food industries:

Laws:

OIL CLENER EURO X can be used with water in varying concentrations by soaking, wetting, brushing or spraying. The dilution depends on the heaviness of the soil from items diluted up to 50 parts of water.

After use for **OIL CLENER EURO X** to act and then rinse off with water under pressure.

For further details:

Contact **Tally Primordy** **OIL CLENER EURO X** with 1 to 2 parts of water.

For Decontamination:

		WATKINS SAFETY DATA SHEET			
Identify Information					
Brand Name	O.W.L. Absorbent-Cleaning				
Producer	Dehydrogen Absorbent Corp. Most				
Usage	Hydrocarbon & Chemical Absorbent				
Manufacturer's Address	2000 Alameda Blvd. Tampa, FL 33604				
Distributor	Tampa Shiping Ltd.				
Address	10000 N. 15th Ave. Pomona, Idaho 83653				
Emergency Telephone	800-352-4444				
Emergency Fax	(800)302-0423(2368)				
Properties					
Absorption:	Can absorb approximately 4.8 liter of motor oil per pound used. It will not leech sorbent oil of permebrates.				
Biodegradation:	In the presence of adequate quantities of certain hydrocarbons the harmless hydrocarbons. Degradation may become biodegradation. Contaminated soils is already common practice in many parts of the world.				
Vapour suppressor:	Can reduce flammable vapours on hydrocarbon-contaminated site by up to 90%. Risk of explosion is reduced and a hazardous spill is made more manageable.				
Instructions					
How to use:	Put product to completely cover spill. Allow to absorb a few minutes. Sweep, scoop or dump in 3 to 6 inches.				
Storage:					
Physical/Chemical Characteristics					
Appearance:	Black, Non-toxic particles				
Composition:	Earthly				
Asphaltenes:	Asphaltenes peed mass	+/- 10-47%			
Water:	Water/Moisture	+/- 15-15%			
Grain:	Monosulfonated peed	+/- 10-47%			
Specific Gravity:	HT to H2O (Vier Poet scales)	+/- 15-15%			
Stability:	Stable at 500 degrees	No soluble in water			
pH:	Chemically, hydrocarbon, non-oxidative, nonacidic				
Sublimation:	22-25°F				
Melting Point:	22.3%				
Humic Acid:	22.3% (total organic matter)				
Fire & Explosion Hazard					
Autoignition Temperature:	200°C - 300°F				
Flash Point:	None				
Flammable Limits:	None				
Fire Hazard:	Minimal				
Reactivity Data	No reaction with oxidizing agents				
Corrosivity to steel	None known				
Incompatibility:	Strongly acidic (pH < 3)				
Hazardous Decomposition	None known				
Byproduct:	None known				
Hazardous Polymerization:	Does not occur under dry conditions				
Health Hazard Data					
Routes of entry:	Inhalation, open wounds, eyes				
Health Hazards:	None known				
Routes of Entry:	Inhalation over long periods of high amounts of any substance that may overload lung clearance mechanism, irritate mucous membranes and make lungs more vulnerable in respiratory disease.				
Effect of Exposure:	Irritation, possible death if... If eye irritation occurs, flush with water. Keep open wounds covered and clean as suggested by a good programme of hygiene.				
Acute and Chronic:					
Precautions:					
Toxicological Properties					
Exposure Limit:	TWA 100 mg / m3				
Skin Contact:	No known hazard				
Eye Contact:	No known hazard				
Ingestion:	Dust particles may cause slight irritation with very high concentrations.				
No known hazard:					
Control Measure					
Respiratory Protection:	If dust is created, use approved respirator for maximum dust of the type.				
Ventilation:	Ventilation should be available in order to keep dust concentration below exposure limits.				
Eye Protection:	Protective eyewear should be worn for high dust levels may cause irritation.				
Supplemental Information					
These materials are made from natural products and contain naturally occurring microorganisms. Proper procedures are advised to prevent infection of open wounds, inhalation of microorganisms and dust and eyes irritation. The correct hygiene practices required to prevent health hazards from any naturally occurring microorganisms.					
The information contained herein is made available without warranty of any kind, express or implied. The information contained herein is made available solely for consideration, investigation, and verification by the original recipients thereof. Users should consider this information only as a supplement to other information gathered by or available to them. Users should make independent determinations of the suitability and appropriateness of information from this source for their own use. Users should be responsible for the safety and health of employees, customers, and the environment. Users have the responsibility to keep currently informed of information from this source. It is recommended that users consult their own engineers and to comply with all laws, and environmental protection.					

O.W.L is a heat treated sphagnum peat

Which provides a uniquely effective way of protection of the environment from hydrocarbons and chemical spills. The material is highly absorbent and quickly wipes up spilled oils and other contaminants in seconds. It differs from conventional cleaning materials because it completely absorbs hydrocarbon leaks. Its cells are empty so that the pollutant is completely encased in the moss structure. Applied to an oil spill – on the ground or in water – O.W.L cleans up 100%.

- It is non-toxic to humans and the environment.
- It is completely biodegradable.
- Does not leave soil, water or groundwater contamination.
- Can be used thermally.

ABSOLUTE EFFICIENCY

- Absorbs spills completely in seconds.
- Collects easily and without leaving any residue.
- It is universal and easy to use: one solution for many oils, fuels and a wide range of chemicals.
- Works on all surfaces.
- Can be economically discarded due to its light weight.

ABSOLUTE PERFORMANCE

- Has an absorption level of up to 100%.
- Absorbs up to 8-10 times its weight.
- Can be reused many times until fully saturated. O.W.L is extremely light, very economical and easy to handle.
- Encapsulates absorbed substances and does not release them again, even under increased pressure.
- It is hydrophobic and therefore can be used in water.

When used on wet surfaces, the performance of O.W.L is increased.

Comment:

Absorption capacity may vary depending on the substance.

Comment:

Absorption capacity may vary depending on the substance.

CRUDE OIL 100% ABSORPTION

Heavy oil, marine diesel, heating oil, engine oil, hydraulic oil, oil-based lubricants, petroleum, liquid paraffins, cooking oils and animal oils.

GASOLINE FUELS

100% ABSORPTION.

Diesel fuel, jet fuel.

CHEMICALLY

100% ABSORPTION.

Alcohols, hydrophobic solvents, polychlorinated biphenyls (PCBs), styrenes, turpentine and a whole host of other chemicals.

100% ABSORPTION.

Oil-based paints and varnishes, brake fluids, oil-based coolants, blood.

WATER

O.W.L is light and buoyant. It is ideal for use in calm and rough waters. Spilled substances are immediately and completely absorbed. Even saturated O.W.L does not sink and can simply be vacuumed.

TERRAIN

O.W.L is 100% organic and completely non-toxic. If the soil is contaminated, O.W.L can be applied and mixed to absorb the spill and help re-cultivate the soil.

ROAD

O.W.L absorbs spills in seconds on industrial surfaces and asphalt. It does not settle into the pores of the lid. This guarantees fast traction recovery of up to 98% – ideal for use on all traffic routes and in motorsport

EXCLUSIVE DISTRIBUTOR



PROMOTION & SALES

Spare parts trading - Sales promotion
Afroditi 12 Dafni 17235
M. : +30 6944246011
T. : +30 2109708238
E. : info@kvpromosales.gr
W. : www.kvpromosales.gr